




ROTATING BEACONS

Code No:	Voltage:	Light Source:	Current:
R401-13	12v Dc ---	H1 x 55w	4.70 A
R401-14	24v Dc ---	H1 x 70w	3.00 A
R401-60	12v Dc ---	Ba15d x 21w	1.85 A
R401-61	24v Dc ---	Ba15d x 21w	0.95 A
R401-62	12v Dc ---	Ba15d x 48w	4.00 A
R401-63	24v Dc ---	Ba15d x 48w	2.00 A
R401-64	48v Dc ---	Ba15d x 25w	0.60 A
R400-03	24v Ac ~	Ba15d x 48w	2.00 A
R400-02	48v Ac ~	Ba15d x 25w	0.55 A
R400-04	115v Ac ~	E14 x 60w	0.55 A
R400-05	230v Ac ~	E14 x 60w	0.29 A

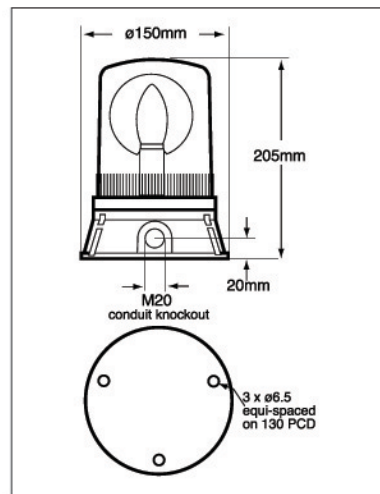

01

02

03

04

05



C -10+66

IP 65



50 Hz

Kg 0.98



r.p.m.160±30DC



r.p.m.120AC

MOFLASH
SIGNALLING LTD

Unit 18, Klaxon Industrial Estate
Warwick Road, Tyseley,
Birmingham B11 2HA
England

Email: sales@moflash.co.uk
Web: <http://www.moflash.co.uk>
Tel: ++44 (0) 121 707 6681
Fax: ++44 (0) 121 707 8305