

Flashguard Xenon Beacons



Features

- Compact, ultra modern sleek appearance
- Ease of installation with first-fix option on standard models
- Weatherproof to IP67
- White, high quality polycarbonate housing
- 12V and 24V DC options in one user-selectable unit.
- Vandal-resistant safety locking mechanism

Overview

Flashguard weatherproof xenon beacons are ideal visual indicators in a variety of applications.

All Flashguard beacons are fitted with a diffuser for greater visibility and spread of light. Two styles are available, Standard and Ultra Low Profile.


Standard: includes a terminal block and a 27mm deep base supplied with a seal and grommet.

Ultra Low Profile: comes complete with a screw and nylon wing nut and is supplied with mounting gasket and 40cm of cable.

A weatherproof cable connector is available to upgrade the product from IP65 rating to IP67.

Applications

- Fire alarm; security alert; emergency warning; process control alarm

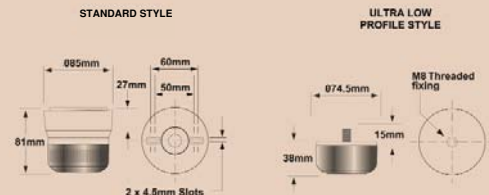

- Fire
- Security
- Industrial
- Railway/Marine
- Hazardous Area
- Public Warning

| Type and Style | Part No. Red Lens | Part No. Amber Lens | Part No. Clear Lens | Part No. Blue Lens | Part No Green Lens | Voltage | Power | Current | Flash Rate |
|-------------------------|-------------------|---------------------|---------------------|--------------------|--------------------|------------|-------|------------|------------|
| Xenon Standard | 45-711311 | 45-711321 | 45-711331 | 45-711341 | 45-711351 | 110V AC | 3W | 24mA | 1Hz |
| Xenon Standard | 45-712311 | 45-712321 | 45-712331 | 45-712341 | 45-712351 | 230V AC | 3W | 15mA | 1Hz |
| Xenon Standard | 45-713311 | 45-713321 | 45-713331 | 45-713341 | 45-713351 | 12/24V DC* | 3W | 140mA/85mA | 1Hz |
| Xenon Standard | 45-713211 | 45-713221 | 45-713231 | 45-713241 | 45-713251 | 12/24V DC* | 2W | 115mA/70mA | 1Hz |
| Xenon Standard | 45-713111 | 45-713121 | 45-713131 | 45-713141 | 45-713151 | 12/24V DC* | 1W | 60mA/45mA | 1Hz |
| Xenon Ultra Low Profile | 45-713213 | 45-713223 | 45-713233 | 45-713243 | 45-713253 | 12/24V DC* | 2W | 115mA/70mA | 1Hz |

*These units are user-configurable

IP Rating: IP65 (Standard) IP67 (Ultra) **Operating Temp:** -20°C to +70°C **Construction:** UV Stabilised Polycarbonate
Weight: 0.14kg (0.08kg ultra low)